


KENDALL HOWARD ®

Installation Instructions **Enclosed V-Rack Cabinets** **Part Number: EVR3U25, EVR6U25**

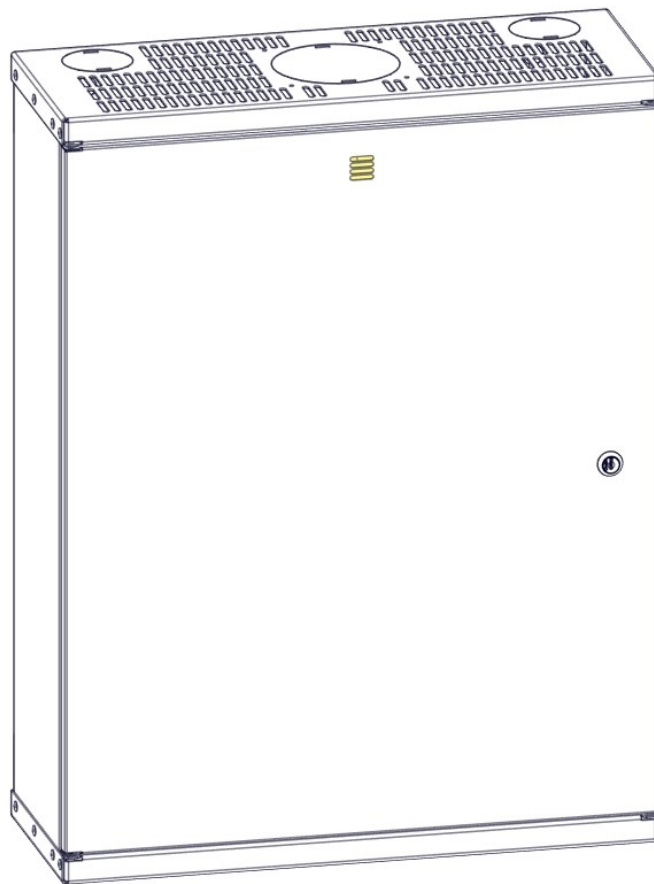


Address: 10152 Liberty Lane
Chisago City, Minnesota, 55013
United States of America

Phone: 651-213-1333
Fax: 800-418-6897


www.kendallhoward.com

Tools needed:

Screw Driver

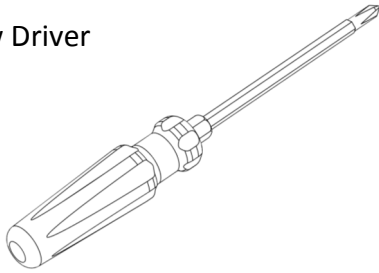


May also need
a Power Drill

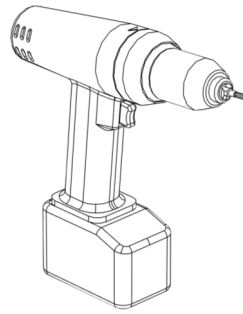


Bolts and wall anchors are not included

What is included...

1x Hanging Bracket Kit



2x Vertical Slide out Rail



2x Vertical

Mounting Rail



1x Cabinet



2x Horizontal


Mounting Rail




24x 10-32x.0.750 Rack Screws





12x 10-32x.0.375 Button Screws



Step 1: Hanging the cabinet on the Wall. The cabinet must be hung using the appropriate wall mount anchors or fasteners for your wall material. Each cabinet contains four keyhole mounting holes, which are utilized to secure the cabinet to the wall.

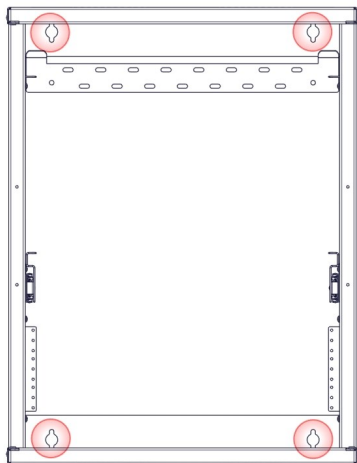


Step 2: To remove the door, pull the spring loaded hinges to release the door. The door can be reversed and mounted the opposite orientation.

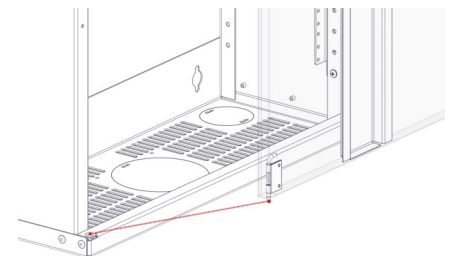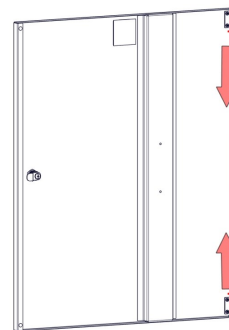


For details about product warranty, please visit www.kendallhoward.com

DISCLAIMER: Kendall Howard LLC. endeavors to make this manual accurate and complete. However, Kendall Howard LLC makes no representations or warranties of any kind, expressed or implied, about whether the use of products contained herein would infringe any rights or the correctness, accuracy or reliability of the information contained herein or that said information covers all details, conditions or variations. The information herein does not provide for every possible contingency in connection with the installation or use of the product(s). The information contained in this document is subject to change without notice or obligation. Kendall Howard LLC assumes no responsibility for the accuracy, completeness or reliability of the information contained in this document. Any reliance placed on the information is therefore strictly at your own risk.

Step 3: To move the rails, use a Philips head screw driver to remove the sheet metal screw on each rail. The sheet metal screw can be discarded. The screw is used to secure rail during shipping.

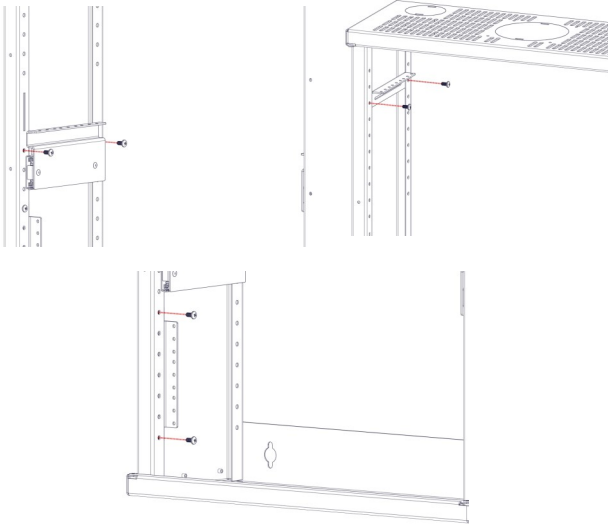

Step 4: Use a screwdriver to remove button head screws. Move the rail to the desired location. Use screw driver to fasten rail into place.

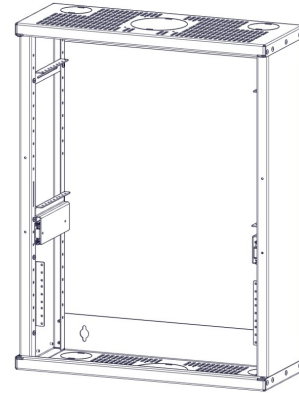

For details about product warranty, please visit www.kendallhoward.com

DISCLAIMER: Kendall Howard LLC. endeavors to make this manual accurate and complete. However, Kendall Howard LLC makes no representations or warranties of any kind, expressed or implied, about whether the use of products contained herein would infringe any rights or the correctness, accuracy or reliability of the information contained herein or that said information covers all details, conditions or variations. The information herein does not provide for every possible contingency in connection with the installation or use of the product(s). The information contained in this document is subject to change without notice or obligation. Kendall Howard LLC assumes no responsibility for the accuracy, completeness or reliability of the information contained in this document. Any reliance placed on the information is therefore strictly at your own risk.