



Our 2U 48 Port Blank High Density Patch Panel is an excellent choice for home or office networks. These panels are RoHS compliant and made from SPCC steel and ABS high impact thermoplastic with a black powder coating, SPCC cable support bar and rounded edges.

Features

- Made with SPCC 1.5mm steel
- 19" rack mountable
- 2U high density 48 ports
- 18 AWG ground wire, 40CM long

Material

- Panel: SPCC 1.5mm steel with black paint
- Plastic Frame: ABS High-Impact UL94V-0 Termo
- Cable Manager: SPCC 1.5mm steel with black paint

Physical Characteristics

- Dimensions:
 - Length: 19 Inches (482.6mm)
 - Height: 2U (88mm)
 - Depth: 3.69 Inches (93.65mm)

Optional Keystone Jacks & Couplers

High Density Jacks/Couplers, CAT5E / CAT6 / CAT6A

We have a large variety of high density CAT5, CAT6 & CAT6A keystone jacks and couplers which include: our MIG+ line, component rated, unshielded, shielded, tool-less and more.



MIG+ Keystone Jacks

- CAT5E: K52-
- CAT6: K62-
- CAT6A: K62A-

Tool-Less Keystone Jacks

- CAT5E: K54-
- CAT6: K64

Shielded Keystone Jacks

- CAT5E: K56-
- CAT6: K66-
- CAT6A: K62A-

In-Line Keystone Couplers


- CAT5E: K55-
- CAT6: K65-
- CAT6A: K62A-

Blank 2U 48 Port Patch Panel High Density with Support Bar

Blank Patch Panel



Patch Panel Item Number:
48 Port Item# PP3-6443/48B

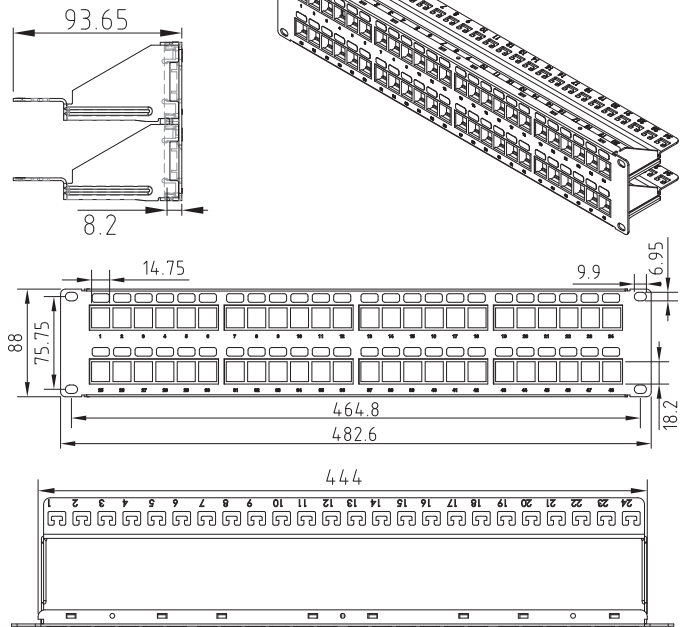

©2020 CRN Solutions Inc. dba. Primus Cable
All Rights Reserved.

Although Primus Cable makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Primus Cable provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Primus Cable be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Primus Cable has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Primus Cable products are subject to Primus Cable's standard terms and conditions of sale. Primus Cable believes this product to be in compliance with EU RoHS (Directive 2002/EC, 27 Jan. 2003). Material manufactured prior to the compliance date may be in stock at Primus Cable facilities and in our Distributor's inventory. The information provided in this Product Disclosure, and the identification of materials listed as reportable or restricted within the Product Disclosure, is correct to the best of Primus Cable's knowledge, information, and belief at the date any other operation of the product itself or the one that it becomes a part of. This Product Disclosure is not to be considered a warranty or quality specification and regulations based on their individual usage of the product.

Primus Cable declares this product to be in compliance with EU LVD (Low Voltage Directive 73/23/EEC), as amended by directive 93/68/EEC