

DESCRIPTION

The JV-DVF is a flush-mount, stainless steel color video door station for the JV Series. The station connects to a JV Series master or expansion station using an 18AWG 2-conductor solid core cable. The station is mounted to the included flush mount box with four included tamper-resistant screws. It can also be surface mounted to an SBX-DVF box, not included.

The JV-DVF features an LED to light the area during a call, as well as an illuminated slot for a name plate.

The JV-DVF is available as part of the JVS-1F kit, which includes a JV-1MD master station and a PS-2420UL power supply. It is not sold separately.


FEATURES

- Video camera with audio intercom
- Two-way, hands-free voice communication with master and expansion stations
- Vandal-resistant, stainless steel construction
- Flush mount, or surface mount with SBX-DVF box
- Call button with lit bell icon
- White LED illuminator for low-light conditions
- Included in JVS-1F kit, not sold separately

JV-DVF

JV Series Flush Mount Vandal-Resistant Door Station

FEATURE CALL-OUT

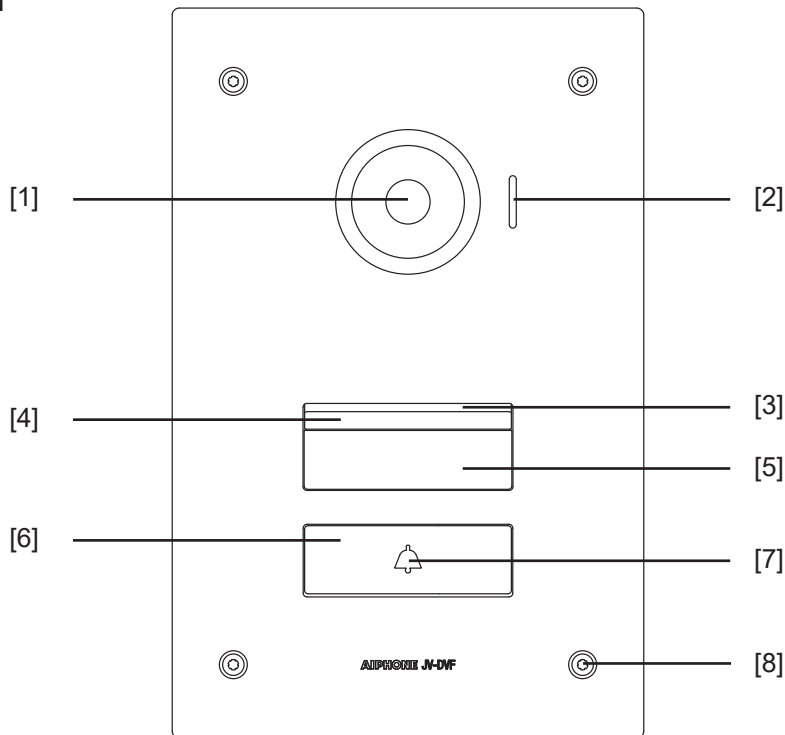

FEATURE CALL-OUT DEFINITIONS

- [1] Camera
- [2] Microphone
- [3] Speaker
- [4] White LED
- [5] Nameplate cover
- [6] Call button
- [7] Lit bell icon
- [8] Tamper-proof screws (x4)

SPECIFICATIONS

Power Source:	Supplied by JV-1MD or JV-1FD
Dry Contact:	N/O 24V AC/DC, 1A
Wet Contact:	12V DC 500mA or less
Input Contact:	Dry contact (N/O)
Communication:	Auto-voice actuation
Camera:	1/5" color CMOS
Min. Illumination:	Approx. 5 lux
Wiring:	2-conductor, PE insulation Aiphone wire #871802
Wiring Distance:	330'
Material:	Front Panel: Stainless steel Main unit: Flame resistant ABS
Mounting:	Flush mount
Color:	Silver
Operating Temp:	-4~140°F (-20~60°C)
IP Rating:	IP54
IK Rating:	IK08
Dimensions (HxW):	8-1/4" x 5-5/16"
Weight:	Main unit: 1.26 lbs (570g) Flush mount box: 0.98 lbs (440g)